


N8

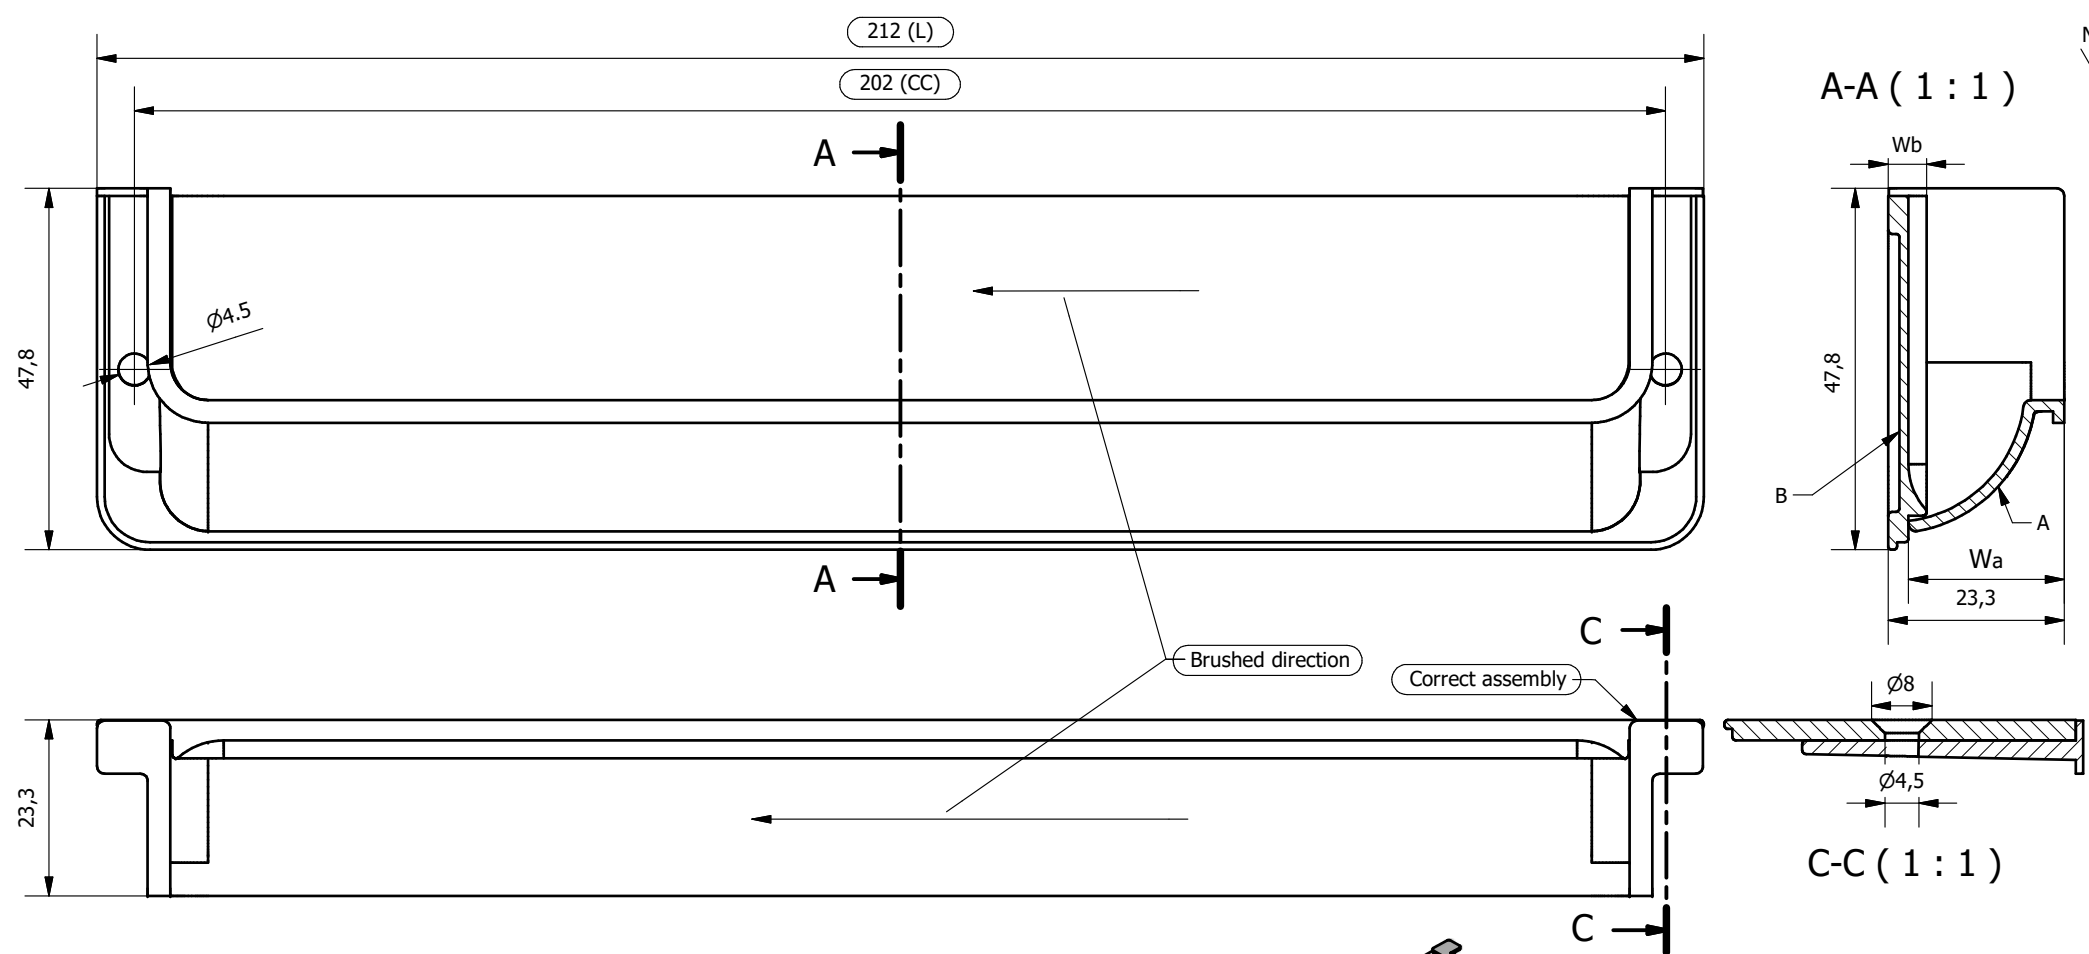

| Model | L | CC | Wa | Wb | Screws |
|---------------------------|-----|-----|------|----|-------------|
| Only back plate | | | | | |
| 0105001Z01 | 212 | 202 | | 5 | 2pcs 4x15FA |
| 0105001Z23 | 212 | 202 | | 5 | 2pcs 4x15FA |
| 0105001ZM1 | 212 | 202 | | 5 | 2pcs 4x15FA |
| Without back plate | | | | | |
| 0105186Z01 | 212 | 202 | 18.6 | | 2pcs 4x15FA |
| Assembly white back plate | | | | | |
| 0105186Z01M1 | 212 | 202 | 18.6 | | 2pcs 4x15FA |
| 0105186Z23M1 | 212 | 202 | 18.6 | | 2pcs 4x15FA |
| Assembly back plate=front | | | | | |
| 0105186Z01ST | 212 | 202 | 18.6 | | 2pcs 4x15FA |
| 0105186Z23ST | 212 | 202 | 18.6 | | 2pcs 4x15FA |
| 0105206Z23ST | 212 | 202 | 20.6 | | 2pcs 4x15FA |

For inspection

| Ref. | QTY | PART NUMBER | DESCRIPTION |
|------|-----|-------------|-------------|
| A | 1 | FRONTAL | Door |
| B | 1 | TAPA | Back plate |

Toleràncies en mm segons DIN ISO-2768-m

| >0.5-3 | >3-6 | >6-30 | >30-120 | >120-400 | >400-1000 | >1000-2000 | >2000-4000 | Angle |
|--------|------|-------|---------|----------|-----------|------------|------------|-------|
| ±0.1 | ±0.1 | ±0.2 | ±0.3 | ±0.5 | ±0.8 | ±1.2 | ±2 | 0.5° |

Toleràncies específiques producte:

| | |
|--------------|---|
| CC = ± 0.3mm | L = 120-599(+0.5 -0.2) 600-1200 (+0.8 -0.2) |
|--------------|---|

| Nº | Modificado | Fecha | Tolerancia | Escala | Dibujado | 18/2/2016 | Bet B.S. |
|------------------|-------------|----------|------------|--------|------------|-----------|----------|
| 01 | New drawing | 19/06/18 | ISO 2768-m | 1:1 | Comprobado | 18/2/2016 | Bet B.S. |
| Material: Zamak | | | | | | | |
| Tratamiento: | | | | | | | Peso: |
| Version: 0105_01 | | | | | | | |



NEST

0105
Código